

Last answer memory (ANS)

The calculation result obtained by pressing $\boxed{\text{ANS}}$ or any other calculation ending instruction is automatically stored in the last answer memory. A Matrix/List format result is not stored.

Formula memories (F1 – F4)

Formulas up to 256 characters in total can be stored in F1 – F4. (Functions such as sin, etc., will be counted as one letter.) Storing a new equation in each memory will automatically replace the existing equation.

Note:

- Calculation results from the functions indicated below are automatically stored in memories X or Y replacing existing values.
 - Random function Y memory
 - $\rightarrow r\theta$, $\rightarrow xy$, X memory (r or x), Y memory (θ or y)
- Use of $\boxed{\text{RCL}}$ or $\boxed{\text{ALPHA}}$ will recall the value stored in memory using up to 14 digits.

Chain Calculations

- The previous calculation result can be used in the subsequent calculation. However, it cannot be recalled after entering multiple instructions or when the calculation result is in Matrix/List format.
- When using postfix functions ($\sqrt{}$, sin, etc.), a chain calculation is possible even if the previous calculation result is cleared by the use of the $\boxed{\text{ONC}}$ key.

Fraction Calculations

- Arithmetic operations and memory calculations can be performed using fractions, and conversion between a decimal number and a fraction.
- If the number of digits to be displayed is greater than 10, the number is converted to and displayed as a decimal number.

Binary, Pental, Octal, Decimal, and Hexadecimal Operations (N-Base)

Conversions can be performed between N-base numbers. The four basic arithmetic operations, calculations with parentheses and memory calculations can also be performed, along with the logical operations AND, OR, NOT, NEG, XOR and XNOR on binary, pental, octal and hexadecimal numbers.

Conversion to each system is performed by the following keys:

- $\boxed{2ndF} \boxed{\bullet \text{BIN}}$: Converts to the binary system. "b" appears.
- $\boxed{2ndF} \boxed{\bullet \text{PEN}}$: Converts to the pental system. "p" appears.
- $\boxed{2ndF} \boxed{\bullet \text{OCT}}$: Converts to the octal system. "o" appears.
- $\boxed{2ndF} \boxed{\bullet \text{HEX}}$: Converts to the hexadecimal system. "H" appears.
- $\boxed{2ndF} \boxed{\bullet \text{DEC}}$: Converts to the decimal system. "d", "P", "o" and "H" disappear from the display.

Conversion is performed on the displayed value when these keys are pressed.

Note: The hexadecimal numbers A – F are entered by pressing $\boxed{\text{R}}$, $\boxed{\text{Y}}$, $\boxed{\text{X}}$, $\boxed{\text{Z}}$, $\boxed{\text{A}}$, $\boxed{\text{B}}$ and displayed as follows:

A \rightarrow R, B \rightarrow Y, C \rightarrow Z, D \rightarrow X, E \rightarrow A, F \rightarrow B

In the binary, pental, octal, and hexadecimal systems, fractional parts cannot be entered. When a decimal number having a fractional part is converted into a binary, pental, octal, or hexadecimal number, the fractional part will be truncated. Likewise, when the result of a binary, pental, octal, or hexadecimal calculation includes a fractional part, the fractional part will be truncated. In the binary, pental, octal, and hexadecimal systems, negative numbers are displayed as a complement.

Time, Decimal and Sexagesimal Calculations


Conversion between decimal and sexagesimal numbers can be performed, and, while using sexagesimal numbers, conversion to seconds and minutes notation. The four basic arithmetic operations and memory calculations can be performed using the sexagesimal system.

Notation for sexagesimal is as follows:

12°34'56.78"
degree minute second

Coordinate Conversions

- Before performing a calculation, select the angular unit.



- The calculation result is automatically stored in memories X and Y.
Value of r or x : X memory Value of θ or y : Y memory

Calculations Using Physical Constants

A constant is recalled by pressing $\boxed{2ndF} \boxed{\text{ONST}}$ followed by the number of the physical constant designated by a 2-digit number. The recalled constant appears in the display mode selected with the designated number of decimal places.

Physical constants can be recalled in the normal mode (when not set to binary, pental, octal, or hexadecimal), statistics mode, equation mode, matrix mode and list mode.

Note: Physical constants and metric conversions are based either on the 2014 CODATA recommended values or 2008 Edition of the "Guide for the Use of the International System of Units (SI)" released by NIST (National Institute of Standards and Technology) or on ISO specifications.

No.	Constant	No.	Constant
01	Speed of light in vacuum	28	Avogadro constant
02	Newtonian constant of gravitation	29	Molar volume of ideal gas (273.15 K, 101.325 kPa)
03	Standard acceleration of gravity	30	Molar gas constant
04	Electron mass	31	Faraday constant
05	Proton mass	32	Von Klitzing constant
06	Neutron mass	33	Electron charge to mass quotient
07	Muon mass	34	Quantum of circulation
08	Atomic mass unit-kilogram relationship	35	Proton gyromagnetic ratio
09	Elementary charge	36	Josephson constant
10	Planck constant	37	Electron volt
11	Boltzmann constant	38	Celsius Temperature
12	Magnetic constant	39	Astronomical unit
13	Electric constant	40	Parsec
14	Classical electron radius	41	Molar mass of carbon-12
15	Fine-structure constant	42	Planck constant over 2 pi
16	Bohr radius	43	Hartree energy
17	Rydberg constant	44	Conductance quantum
18	Magnetic flux quantum	45	Inverse fine-structure constant
19	Bohr magneton	46	Proton-electron mass ratio
20	Electron magnetic moment	47	Molar mass constant
21	Nuclear magneton	48	Neutron Compton wavelength
22	Proton magnetic moment	49	First radiation constant
23	Neutron magnetic moment	50	Second radiation constant
24	Muon magnetic moment	51	Characteristic impedance of vacuum
25	Compton wavelength	52	Standard atmosphere
26	Proton Compton wavelength		
27	Stefan-Boltzmann constant		

Metric Conversions

Unit conversions can be performed in the normal mode (when not set to binary, pental, octal, or hexadecimal), statistics mode, equation mode, matrix mode and list mode.

No.	Remarks	No.	Remarks
01	in : inch	23	fl oz (US) : fluid ounce(US)
02	cm : centimeter	24	mL : milliliter
03	ft : foot	25	fl oz (UK) : fluid ounce(UK)
04	m : meter	26	mL : milliliter
05	yd : yard	27	J : Joule
06	m : meter	28	cal : calorie
07	mile : mile	29	J : Joule
08	km : kilometer	30	calis : Calorie (15n°C)
09	n mile : nautical mile	31	J : Joule
10	m : meter	32	caltr : I.T. calorie
11	acre : acre	33	hp : horsepower
12	m² : square meter	34	W : watt
13	oz : ounce	35	ps : French horsepower
14	g : gram	36	W : watt
15	lb : pound	37	(kgf/cm²)
16	kg : kilogram	38	Pa : Pascal
17	°F : Degree Fahrenheit	39	atm : atmosphere
18	°C : Degree Celsius	40	Pa : Pascal
19	gal (US) : gallon (US)	41	(1 mmHg = 1 Torr)
20	L : liter	42	Pa : Pascal
21	gal (UK) : gallon (UK)	43	(kgf·m)
22	L : liter	44	J : Joule

Calculations Using Engineering Prefixes

Calculation can be executed in the normal mode (excluding Nbase) using the following 9 types of prefixes.

Prefix	Operation	Unit	Prefix	Operation	Unit
k (kilo)	$\boxed{\text{MATH}} \boxed{1} \boxed{0}$	10^3	μ (micro)	$\boxed{\text{MATH}} \boxed{1} \boxed{5}$	10^{-6}
M (Mega)	$\boxed{\text{MATH}} \boxed{1} \boxed{1}$	10^6	n (nano)	$\boxed{\text{MATH}} \boxed{1} \boxed{6}$	10^{-9}
G (Giga)	$\boxed{\text{MATH}} \boxed{1} \boxed{2}$	10^9	p (pico)	$\boxed{\text{MATH}} \boxed{1} \boxed{7}$	10^{-12}
T (Tera)	$\boxed{\text{MATH}} \boxed{1} \boxed{3}$	10^{12}	f (femto)	$\boxed{\text{MATH}} \boxed{1} \boxed{8}$	10^{-15}
m (milli)	$\boxed{\text{MATH}} \boxed{1} \boxed{4}$	10^{-3}			

Modify Function

Calculation results are internally obtained in scientific notation with up to 14 digits for the mantissa. However, since calculation results are displayed in the form designated by the display notation and the number of decimal places indicated, the internal calculation result may differ from that shown in the display. By using the modify function, the internal value is converted to match that of the display, so that the displayed value can be used without change in subsequent operations.

Solver Function

The x value can be found that reduces an entered equation to "0".

- This function uses Newton's method to obtain an approximation. Depending on the function (e.g. periodic) or start value, an error may occur (Error 2) due to there being no convergence to the solution for the equation.
- The value obtained by this function may include a margin of error. If it is larger than acceptable, recalculate the solution after changing 'Start' and dx values.
- Change the 'Start' value (e.g. to a negative value) or dx value (e.g. to a smaller value) if:
 - no solution can be found (Error 2).
 - more than two solutions appear to be possible (e.g. a cubic equation).
 - to improve the arithmetic precision.
- The calculation result is automatically stored in the X memory.

Performing Solver function

1. Press $\boxed{\text{MODE}} \boxed{0}$.
2. Input a formula with an x variable.
3. Press $\boxed{\text{MATH}} \boxed{0}$.
4. Input 'Start' value and press $\boxed{\text{ENT}}$. The default value is "0".
5. Input dx value (minute interval).
6. Press $\boxed{\text{ENT}}$.

SIMULATION CALCULATION (ALGB)

If you have to find a value consecutively using the same formula, such as plotting a curve line for $2x^2 + 1$, or finding the variable for $2x + 2y = 14$, once you enter the equation, all you have to do is to specify the value for the variable in the formula.

Usable variables: A – F, M, X and Y

Unusable functions: Random function

• Simulation calculations can only be executed in the normal mode.

• Calculation ending instructions other than $\boxed{=}$ cannot be used.

Performing Calculations

1. Press $\boxed{\text{MODE}} \boxed{0}$.
2. Input a formula with at least one variable.
3. Press $\boxed{2ndF} \boxed{\text{ALGB}}$.
4. Variable input screen will appear. Input the value of the flashing variable, then press $\boxed{\text{ENT}}$ to confirm. The calculation result will be displayed after entering the value for all used variables.
 - Only numerical values are allowed as variables. Input of formulas is not permitted.
 - Upon completing the calculation, press $\boxed{2ndF} \boxed{\text{ALGB}}$ to perform calculations using the same formula.
 - Variables and numerical values stored in the memories will be displayed in the variable input screen. To change a numerical value, input the new value and press $\boxed{\text{ENT}}$.
 - Performing simulation calculation will cause memory locations to be overwritten with new values.

STATISTICAL CALCULATIONS

Press $\boxed{\text{MODE}} \boxed{1}$ to select the statistics mode. The seven statistical calculations listed below can be performed. After selecting the statistics mode, select the desired sub-mode by pressing the number key corresponding to your choice.

To change statistical sub-mode, reselect statistics mode (press $\boxed{\text{MODE}} \boxed{1}$), then select the required sub-mode.

- $\boxed{0}$ (SD) : Single-variable statistics
- $\boxed{1}$ (LINE) : Linear regression calculation
- $\boxed{2}$ (QUAD) : Quadratic regression calculation
- $\boxed{3}$ (EXP) : Exponential regression calculation
- $\boxed{4}$ (LOG) : Logarithmic regression calculation
- $\boxed{5}$ (PWR) : Power regression calculation
- $\boxed{6}$ (INV) : Inverse regression calculation

The following statistics can be obtained for each statistical calculation:

Single-variable statistical calculation

Statistics of ① and value of the normal probability function

Linear regression calculation

Statistics of ① and ②, and, in addition, estimate of y for a given x (estimate y') and estimate of x for a given y (estimate x')

Exponential regression, Logarithmic regression, Power regression, and Inverse regression calculation

Statistics of ① and ②. In addition, estimate of y for a given x and estimate of x for a given y . (Since the calculator converts each formula into a linear regression formula before actual calculation takes place, it obtains all statistics, except coefficients a and b , from converted data rather than entered data.)

Quadratic regression calculation

Statistics of ① and ② and coefficients a , b , c in the quadratic regression formula ($y = a + bx + cx^2$). (For quadratic regression calculations, no correlation coefficient (r) can be obtained.) When there are two x' values, press $\boxed{2ndF} \boxed{\leftarrow}$. When performing calculations using a , b and c , only one numeric value can be held.

①	\bar{x}	Mean of samples (x data)
	s_x	Sample standard deviation (x data)
	σ_x	Population standard deviation (x data)
	n	Number of samples
	Σx	Sum of samples (x data)
②	Σx^2	Sum of squares of samples (x data)
	\bar{y}	Means of samples (y data)
	s_y	Sample standard deviation (y data)
	σ_y	Population standard deviation (y data)
	Σy	Sum of samples (y data)
	Σy^2	Sum of squares of samples (y data)
	Σxy	Sum of products of samples (x , y)
	r	Correlation coefficient
	a	Coefficient of regression equation
	b	Coefficient of regression equation
	c	Coefficient of quadratic regression equation

- Use $\boxed{\text{ALPHA}}$ and $\boxed{\text{RCL}}$ to perform a STAT variable calculation.

Data Entry and Correction

Entered data are kept in memory until $\boxed{2ndF} \boxed{\text{CA}}$ or mode selection. Before entering new data, clear the memory contents.

Data Entry

Single-variable data

Data $\boxed{\text{DATA}}$

Data $\boxed{\text{fREQ}}$ frequency $\boxed{\text{DATA}}$ (To enter multiples of the same data)

Two-variable data

Data x $\boxed{\text{fREQ}}$ Data y $\boxed{\text{DATA}}$

Data x $\boxed{\text{fREQ}}$ Data y $\boxed{\text{fREQ}}$ frequency $\boxed{\text{DATA}}$ (To enter multiples of the same data x and y .)

- Up to 100 data items can be entered. With the single-variable data, a data item without frequency assignment is counted as one data item, while an item assigned with frequency is stored as a set of two data items. With the two-variable data, a set of data items without frequency assignment is counted as two data items, while a set of items assigned with frequency is stored as a set of three data items.

Data Correction

Correction prior to pressing $\boxed{\text{DATA}}$ immediately after a data entry:

Delete incorrect data with $\boxed{\text{ONC}}$, then enter the correct data.

Correction after pressing $\boxed{\text{DATA}}$:

Use $\boxed{\blacktriangle} \boxed{\blacktriangledown}$ to display the data previously entered.

Press $\boxed{\blacktriangledown}$ to display data items in ascending (oldest first) order.

To reverse the display order to descending (latest first), press the $\boxed{\blacktriangle}$ key.

Each item is displayed with 'X_{n-1}', 'Y_{n-1}' or 'X_{n-2}' (n is the sequential number of the data set).

Display the data item to modify, input the correct value, then press $\boxed{\text{DATA}}$. Using $\boxed{\text{fREQ}}$, you can correct the values of the data set all at once.

- To delete a data set, display an item of the data set to delete, then press $\boxed{2ndF} \boxed{\text{CD}}$. The data set will be deleted.
- To add a new data set, press $\boxed{\text{ONC}}$ and input the values, then press $\boxed{\text{DATA}}$.

Statistical Calculation Formulas

Type	Regression formula
Linear	$y = a + bx$
Exponential	$y = a \cdot e^{bx}$
Logarithmic	$y = a + b \cdot \ln x$
Power	$y = a + x^b$
Inverse	$y = a + b \cdot \frac{1}{x}$
Quadratic	$y = a + bx + cx^2$

In the statistical calculation formulas, an error will occur when:

- The absolute value of the intermediate result or calculation result is equal to or greater than 1×10^{100} .
- The denominator is zero.
- An attempt is made to take the square root of a negative number.
- No solution exists in the quadratic regression calculation.

Normal Probability Calculations

- P(t), Q(t) and R(t) will always take positive values, even when $t < 0$, because these functions follow the same principle used when solving for an area.
- Values for P(t), Q(t) and R(t) are given to six decimal places.

SIMULTANEOUS LINEAR EQUATIONS

Simultaneous linear equation with two unknowns (2-VLE) or with three unknowns (3-VLE) may be solved using this function.

① 2-VLE: $\boxed{\text{MODE}} \boxed{2} \boxed{0}$

② 3-VLE: $\boxed{\text{MODE}} \boxed{2} \boxed{1}$

- If the determinant D = 0, an error occurs.
- If the absolute value of an intermediate result or calculation result is 1×10^{100} or more, an error occurs.
- Coefficients (a , etc.) can be entered using ordinary arithmetic operations.
- To clear the entered coefficients, press $\boxed{2ndF} \boxed{\text{CA}}$.
- Pressing $\boxed{\text{ENT}}$ when the determinant D is in the display recalls the coefficients. Each time $\boxed{\text{ENT}}$ is pressed, a coefficient is displayed in the order of input, allowing the entered coefficients to be verified (by pressing $\boxed{2ndF} \boxed{\text{ENT}}$, coefficients are displayed in reverse order.) To correct a particular coefficient being displayed, enter the correct value and then press $\boxed{\text{ENT}}$.

QUADRATIC AND CUBIC EQUATION SOLVERS
[26]

Quadratic ($ax^2 + bx + c = 0$) or cubic ($ax^3 + bx^2 + cx + d = 0$) equation may be solved using this function:

- ① Quadratic equation solver: MODE 2 2
 ② Cubic equation solver: MODE 2 3

- Press ENT after entering each coefficient.
 • The result will be displayed by pressing ENT after entering all coefficients. When there are more than 2 results, the next solution will be displayed.
 • When the result is an imaginary number, "xy" symbol will appear. The display can be switched between imaginary and real parts by pressing 2ndF ←→.
 • The results obtained by this function may include a margin of error.

COMPLEX NUMBER CALCULATIONS
[27]

To carry out addition, subtraction, multiplication, and division using complex numbers, press MODE 3 to select the complex number mode.

Results of complex number calculations are expressed in two modes:

- ① 2ndF →xy: Rectangular coordinate mode (xy appears)
 ② 2ndF →rθ: Polar coordinate mode (rθ appears)

Complex number entry

- ① Rectangular coordinates
 x-coordinate + i y-coordinate i
 or x-coordinate + i y-coordinate
 ② Polar coordinates
 r ∠ θ
 r: absolute value θ: argument
 • On selecting another mode, the imaginary part of any complex number stored in the independent memory (M) will be cleared.
 • A complex number expressed in rectangular coordinates with the y-value equal to zero, or expressed in polar coordinates with the angle equal to zero, is treated as a real number.
 • Press MATH 0 to return the complex conjugate of the specified complex number.

MATRIX CALCULATIONS
[28]

This function enables the saving of up to 4 matrices (4 rows x 4 columns) for calculations. Press MODE 4 to enter the matrix mode.

- Matrix data must be entered prior to making calculations. Pressing ▲/▼ will display the matrix edit buffer along with ▲/▼. Enter the value of each item ('ROW', 'COLUMN', and then each element, e.g. 'MAT1,1') and press DATA after each. After entering all items, press ON/C, then press MATH 2 and specify matA–D to save the data.
 • To edit data saved in matA–D, press MATH 1 and specify matA–D to recall the data to the matrix edit buffer. After editing, press ON/C, then press MATH 2 and specify matA–D to save the data.
 • Before performing calculations, press ON/C to close the matrix edit buffer.
 • When results of calculations are in the matrix format, the matrix edit buffer with those results will be displayed. (At this time, you cannot return to the equation.) To save the result in matA–D, press ON/C, then press MATH 2 and specify matA–D.
 • Since there is only one matrix edit buffer, the previous data will be overwritten by the new calculation.
 • In addition to the 4 arithmetic functions (excluding divisions between matrices), x^3 , x^2 and x^{-1} , the following commands are available:

dim (matrix name, row, column)	Returns a matrix with dimensions changed as specified.
fill (value, row, column)	Fills each element with a specified value.
cumul matrix name	Returns the cumulative matrix.
aug (matrix name, matrix name)	Appends the second matrix to the first matrix as new columns. The first and second matrices must have the same number of rows.
identity value	Returns the identity matrix with specified value of rows and columns.
rnd_mat (row, column)	Returns a random matrix with specified values of rows and columns.
det matrix name	Returns the determinant of a square matrix.
trans matrix name	Returns the matrix with the columns transposed to rows and the rows transposed to columns.
mat→list (MATH 5)	Creates lists with elements from the left column of each matrix. (matA→L1, matB→L2, matC→L3, matD→L4) Mode changes from matrix mode to list mode.
matA→list (MATH 6)	Creates lists with elements from each column of the matrix. (matA→L1, L2, L3, L4) Mode changes from matrix mode to list mode.

LIST CALCULATIONS
[29]

This function enables the saving of up to 4 lists of 16 elements for calculations. Press MODE 5 to enter the list mode.

- List data must be entered prior to making calculations. Pressing ▲/▼ will display the list edit buffer along with ▲/▼. Enter the value of each item ('SIZE', and then each element, e.g. 'LIST1') and press DATA after each. After entering all items, press ON/C, then press MATH 2 and specify L1–4 to save the data.
 • To edit data saved in L1–4, press MATH 1 and specify L1–4 to recall the data to the list edit buffer. After editing, press ON/C, then press MATH 2 and specify L1–4 to save the data.
 • Before performing calculations, press ON/C to close the list edit buffer.
 • When results of calculations are in the list format, the list edit buffer with those results will be displayed. (At this time, you cannot return to the equation.) To save the result in L1–4, press ON/C, then press MATH 2 and specify L1–4.
 • Since there is only one list edit buffer, the previous data will be overwritten by the new calculation.
 • In addition to the 4 arithmetic functions, x^3 , x^2 and x^{-1} , the following commands are available:

sortA list name	Sorts list in ascending order.
sortD list name	Sorts list in descending order.
dim (list name, size)	Returns a list with size changed as specified.
fill (value, size)	Enter the specified value for all items.
cumul list name	Sequentially cumulates each item in the list.
df_list list name	Returns a new list using the difference between adjacent items in the list.
aug (list name, list name)	Returns a list appending the specified lists.
min list name	Returns the minimum value in the list.

max list name	Returns the maximum value in the list.
mean list name	Returns the mean value of items in the list.
med list name	Returns the median value of items in the list.
sum list name	Returns the sum of items in the list.
prod list name	Returns the multiplication of items in the list.
stdDv list name	Returns the standard deviation of the list.
vari list name	Returns the variance of the list.
o_prod (list name, list name)	Returns the outer product of 2 lists (vectors).
i_prod (list name, list name)	Returns the inner product of 2 lists (vectors).
abs list name	Returns the absolute value of the list (vector).
list→mat (MATH 5)	Creates matrices with left column data from each list. (L1→matA, L2→matB, L3→matC, L4→matD) Mode changes from list mode to matrix mode.
list→matA (MATH 6)	Creates a matrix with column data from each list. (L1, L2, L3, L4→matA) Mode changes from list mode to matrix mode.

ERROR AND CALCULATION RANGES

Errors

An error will occur if an operation exceeds the calculation ranges, or if a mathematically illegal operation is attempted. When an error occurs, pressing ◀ (or ▶) automatically moves the cursor back to the place in the equation where the error occurred. Edit the equation or press ON/C to clear the equation.

Error Codes and Error Types

- Syntax error (Error 1):
 • An attempt was made to perform an invalid operation.
 Example: 2 2ndF ←→
 Calculation error (Error 2):
 • The absolute value of an intermediate or final calculation result equals or exceeds 10^{99} .
 • An attempt was made to divide by 0 (or an intermediate calculation resulted in zero).
 • The calculation ranges were exceeded while performing calculations.
 Depth error (Error 3):
 • The available number of buffers was exceeded. (There are 10 buffers* for numeric values and 24 buffers for calculation instructions in the normal mode).
 *5 buffers in other modes, and 1 buffer for Matrix/List data
 • Data items exceeded 100 in the statistics mode.
 Equation too long (Error 4):
 • The equation exceeded its maximum input buffer (142 characters). An equation must be shorter than 142 characters.
 Equation recall error (Error 5):
 • The stored equation contains a function not available in the mode used to recall the equation.
 For example, if a numerical value with numbers other than 0 and 1 is stored as a decimal, etc., it cannot be recalled when the calculator is set to binary.
 Memory over error (Error 6):
 • Equation exceeded the formula memory buffer (256 characters in total in F1–F4).
 Invalid error (Error 7):
 • Matrix definition error or entering an invalid value.
 Dimension error (Error 8):
 • Matrix/list dimensions inconsistent while calculation.
 Invalid DIM error (Error 9):
 • Size of matrix/list exceeds calculation range.
 No define error (Error 10):
 • Undefined matrix/list used in calculation.

Equation too long (Error 4):	• The equation exceeded its maximum input buffer (142 characters). An equation must be shorter than 142 characters.
Equation recall error (Error 5):	• The stored equation contains a function not available in the mode used to recall the equation. For example, if a numerical value with numbers other than 0 and 1 is stored as a decimal, etc., it cannot be recalled when the calculator is set to binary.
Memory over error (Error 6):	• Equation exceeded the formula memory buffer (256 characters in total in F1–F4).
Invalid error (Error 7):	• Matrix definition error or entering an invalid value.
Dimension error (Error 8):	• Matrix/list dimensions inconsistent while calculation.
Invalid DIM error (Error 9):	• Size of matrix/list exceeds calculation range.
No define error (Error 10):	• Undefined matrix/list used in calculation.

Calculation Ranges
[30]

- Within the ranges specified, this calculator is accurate to ± 1 of the least significant digit of the mantissa. However, a calculation error increases in continuous calculations due to accumulation of each calculation error. (This is the same for y^x , $\sqrt[n]{}$, $n!$, e^x , \ln , Matrix/List calculations, etc., where continuous calculations are performed internally.)
 Additionally, a calculation error will accumulate and become larger in the vicinity of inflection points and singular points of functions.
 • Calculation ranges:
 $\pm 10^{-99} \sim \pm 9.999999999 \times 10^{99}$ and 0.
 If the absolute value of an entry or a final or intermediate result of a calculation is less than 10^{-99} , the value is considered to be 0 in calculations and in the display.

BATTERY REPLACEMENT

Notes on Battery Replacement

Improper handling of batteries can cause electrolyte leakage or explosion. Be sure to observe the following handling rules:

- Make sure the new battery is the correct type.
- When installing, orient the battery properly as indicated in the calculator.
- The battery is factory-installed before shipment, and may be exhausted before it reaches the service life stated in the specifications.

Notes on erasure of memory contents

When the battery is replaced, the memory contents are erased. Erasure can also occur if the calculator is defective or when it is repaired. Make a note of all important memory contents in case accidental erasure occurs.

When to Replace the Batteries


If the display has poor contrast or nothing appears on the display even when ON/C is pressed in dim lighting, it is time to replace the batteries.

Cautions

- An exhausted battery left in the calculator may leak and damage the calculator.
 • Fluid from a leaking battery accidentally entering an eye could result in serious injury. Should this occur, wash with clean water and immediately consult a doctor.
 • Should fluid from a leaking battery come in contact with your skin or clothes, immediately wash with clean water.
 • If the product is not to be used for some time, to avoid damage to the unit from leaking batteries, remove them and store in a safe place.
 • Do not leave exhausted batteries inside the product.
 • Keep batteries out of the reach of children.
 • Explosion risk may be caused by incorrect handling.
 • Do not throw batteries into a fire as they may explode.

Replacement Procedure

1. Turn the power off by pressing 2ndF OFF.
 2. Remove the screws. (Fig. 1)
 3. Lift the battery cover to remove.
 4. Remove the used battery by prying it out with a ball-point pen or other similar pointed device. (Fig. 2)
 5. Install one new battery. Make sure the "+" side is facing up.
 6. Replace the cover and screws.
 7. Press the RESET switch with the tip of a ball-point pen or similar object.
 • Make sure that the display appears as shown below. If the display does not appear as shown, remove the battery, reinstall it, and check the display once again.

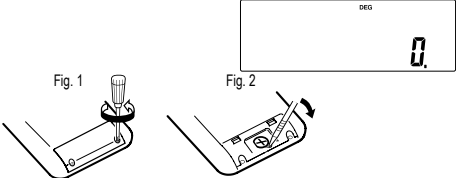

Automatic Power Off Function

This calculator will turn itself off to save battery power if no key is pressed for approximately 10 minutes.

SPECIFICATIONS

Calculations:	Scientific calculations, complex number calculations, equation solvers, statistical calculations, etc.
Internal calculations:	Mantissas of up to 14 digits
Pending operations:	24 calculations, 10 numeric values in the normal mode (5 numeric values in other modes, and 1 numeric value for Matrix/List data)
Power source:	Built-in solar cells 1.5V \approx (DC): Alkaline batterie (LR44 or equivalent) \times 1
Operating time:	Approx. 5,000 hours when continuously displaying 55555 at 25°C (77°F) (varies according to use and other factors)
Operating temperature:	0°C – 40°C (32°F – 104°F)
Dimensions:	80 mm \times 161 mm \times 15 mm
Weight:	Approx. 110 g (with batteries)
Accessories:	Battery \times 1 (installed), operation manual and hard case

FOR MORE INFORMATION ABOUT SHARP CALCULATORS VISIT:

<http://www.sharp-calculators.com>

CALCULATION EXAMPLES

[1] ▲ ▼		
①3(5+2)=	<div>ON/C 3 ((5 + 2)) =</div>	21.
②3×5+2=	<div>3 × 5 + 2 =</div>	17.
③3×5+3×2=	<div>3 × 5 + 3 × 2 =</div>	21.
→①	<div>2ndF ▲</div>	
→②	<div>▼</div>	
→③	<div>▼</div>	
→②	<div>▲</div>	

[2] SETUP		
100000÷3=	<div>ON/C 100000 ÷ 3 =</div>	33'333.33333
[NORM1]	<div>SETUP 1 0</div>	33'333.33333
→[F1X]	<div>SETUP 2 2</div>	33'333.33
[TAB 2]	<div>SETUP 1 1</div>	3.33 ×10 ⁰⁴
→[SCI]	<div>SETUP 1 2</div>	33.33 ×10 ⁰³
→[ENG]	<div>SETUP 1 3</div>	33'333.33333
→[NORM1]		
3÷1000=	<div>ON/C 3 ÷ 1000 =</div>	0.003
[NORM1]	<div>SETUP 1 4</div>	3. ×10 ⁻⁰³
→[NORM2]	<div>SETUP 1 3</div>	0.003
→[NORM1]		

[3] + - × ÷ () +/- Exp		
45+285÷3=	<div>ON/C 45 + 285 ÷ 3 =</div>	140.
18+6 =	<div>(18 + 6) ÷</div>	
15-8 =	<div>(15 - 8) =</div>	3.428571429
42×(-5)+120=	<div>42 × +/- 5 + 120 =</div>	-90.
	<div>*1 (5 +/-) *1</div>	
(5×10 ³)÷(4×10 ⁻³)=	<div>5 Exp 3 ÷ 4 Exp +/- 3 =</div>	1'250'000.

[4]		
34+57=	<div>34 + 57 =</div>	91.
45+57=	<div>45 =</div>	102.
68×25=	<div>68 × 25 =</div>	1'700.
68×40=	<div>40 =</div>	2'720.


[5] sin cos tan sin⁻¹ cos⁻¹ tan⁻¹ π hyp arc hyp ln log e^x 10^x X⁻¹ X² X³ √ y^x √[□] √[□] n! nPr nCr %		
sin60[°]=	<div>ON/C (sin 60 =</div>	0.866025403
cos $\frac{\pi}{4}$ [rad]=	<div>SETUP 0 1 cos (π ÷ 4) =</div>	0.707106781
tan ⁻¹ 1=[g]	<div>SETUP 0 2 2ndF tan⁻¹ 1 =</div> <div>SETUP 0 0 0</div>	50.
(cosh 1.5 + sinh 1.5) ² =	<div>ON/C ((hyp cos 1.5 + hyp sin 1.5) X² =</div>	20.08553692
tanh ⁻¹ $\frac{5}{7}$ =	<div>2ndF arc hyp tan (5 ÷ 7) =</div>	0.895879734
ln 20 =	<div>ln 20 =</div>	2.995732274
log 50 =	<div>log 50 =</div>	1.698970004
e ³ =	<div>2ndF e^x 3 =</div>	20.08553692
10 ^{1.7} =	<div>2ndF 10^x 1.7 =</div>	50.11872336
$\frac{1}{6} + \frac{1}{7}$ =	<div>6 2ndF X⁻¹ + 7 2ndF X⁻¹ =</div>	0.309523809
8 ⁻² - 3 ⁴ × 5 ² =	<div>8 (^{y^x}) +/- 2 - 3 (^{y^x}) 4 × 5 (^{X²}) =</div>	-2'024.984375
(12 ³) $\frac{1}{2}$ =	<div>12 (^{y^x}) 3 (^{y^x}) 4 2ndF X⁻¹ =</div>	6.447419591
8 ³ =	<div>8 (^{X³}) =</div>	512.
√49 -√481 =	<div>2ndF √ 49 - 4 2ndF √ 81 =</div>	4.
√3√27 =	<div>2ndF √ 3 27 =</div>	3.
4! =	<div>4 2ndF n! =</div>	24.
¹⁰ P ₃ =	<div>10 2ndF nPr 3 =</div>	720.
⁵ C ₂ =	<div>5 2ndF nCr 2 =</div>	10.
500×25%=	<div>500 × 25 2ndF % =</div>	125.
120÷400=??%	<div>120 ÷ 400 2ndF % =</div>	30.
500÷(500×25%)=	<div>500 ÷ 25 2ndF % =</div>	625.
400-(400×30%)=	<div>400 - 30 2ndF % =</div>	280.

The range of the results of inverse trigonometric functions

	$\theta = \sin^{-1} x, \theta = \tan^{-1} x$	$\theta = \cos^{-1} x$
DEG	$-90 \leq \theta \leq 90$	$0 \leq \theta \leq 180$
RAD	$-\frac{\pi}{2} \leq \theta \leq \frac{\pi}{2}$	$0 \leq \theta \leq \pi$
GRAD	$-100 \leq \theta \leq 100$	$0 \leq \theta \leq 200$

[6] d/dx f d.x		
d/dx (x ⁴ - 0.5x ³ + 6x ²)	<div>ON/C (ALPHA) X⁴ - 0.5 (ALPHA) X³ + 6 (ALPHA) X²</div>	
x=2	<div>X² + 6 (ALPHA) X²</div>	
d1=0.00002	<div>2ndF d/dx 2 ENT ENT</div>	50.
x=3	<div>ENT 3 ENT 0.001 ENT</div>	130.5000029
d1=0.001		
$\int_2^8 (x^2 - 5) dx$	<div>ON/C (ALPHA) X² - 5</div>	
n=100	<div>f dx 2 ENT 8 ENT ENT</div>	138.
n=10	<div>ENT ENT ENT 10 ENT</div>	138.

[7] DRG		
90°→[rad]	<div>ON/C 90 2ndF DRG</div>	1.570796327
→[g]	<div>2ndF DRG</div>	100.
→[°]	<div>2ndF DRG</div>	90.
sin ⁻¹ 0.8 = [°]	<div>2ndF (sin⁻¹) 0.8 =</div>	53.13010235
→[rad]	<div>2ndF DRG</div>	0.927295218
→[g]	<div>2ndF DRG</div>	59.03344706
→[°]	<div>2ndF DRG</div>	53.13010235

[8] ALPHA RCL STO M+ M- ANS F1 F2 F3 F4		
	<div>ON/C 8 X 2 STO M</div>	16.
24÷(8×2)=	<div>24 ÷ (ALPHA) M =</div>	1.5
(8×2)×5=	<div>ALPHA M × 5 =</div>	80.
	<div>ON/C STO M</div>	0.
\$150×3M1	<div>150 × 3 M+</div>	450.
+\$250:M2 =M1÷250	<div>250 M+</div>	250.
→M2×5%	<div>RCL M × 5 2ndF %</div>	35.
M	<div>2ndF M- RCL M</div>	665.
\$1=¥110	<div>110 STO Y</div>	110.
¥26,510=\$?	<div>26510 ÷ RCL Y (=)</div>	241.
\$2,750=¥?	<div>2750 × RCL Y (=)</div>	302'500.
r=3cm (r→Y)	<div>3 STO Y</div>	3.
πr ² =?	<div>π (ALPHA) Y X² =</div>	28.27433388
$\frac{24}{4+6}$ = 2.4...(A)	<div>24 (÷) (4 + 6) =</div>	2.4
3×(A)+60÷(A)=	<div>3 × (ALPHA) ANS + 60 ÷ (ALPHA) ANS =</div>	32.2
πr ² ⇒F1	<div>π (ALPHA) Y X² STO F1</div>	F1
 V = ?	<div>3 STO Y RCL F1 × 4 ÷ 3 =</div>	37.69911184

[9]		
6+4=ANS	<div>ON/C 6 + 4 =</div>	10.
ANS+5	<div>+ 5 =</div>	15.
8×2=ANS	<div>8 × 2 =</div>	16.
ANS²	<div>X² =</div>	256.
44+37=ANS	<div>44 + 37 =</div>	81.
√ANS=	<div>2ndF √ =</div>	9.

[10] a^b/c d/c		
$3\frac{1}{2} + \frac{4}{3} = [a\frac{b}{c}]$	<div>ON/C 3 (^{a^b/c}) 1 (^{a^b/c}) 2 + 4 (^{a^b/c}) 3 =</div>	4 _r 5 _r 6 _r
→[a.xxx]	<div>a^b/c</div>	4.833333333
→[d/c]	<div>2ndF d/c</div>	29 _r 6
$10^{\frac{2}{3}}$ =	<div>2ndF 10^x 2 (^{a^b/c}) 3 =</div>	4.641588834
$(\frac{7}{5})^5$ =	<div>7 (^{a^b/c}) 5 (^{y^x}) 5 =</div>	16807 _r 3125
$(\frac{1}{8})^{\frac{1}{3}}$ =	<div>1 (^{a^b/c}) 8 (^{y^x}) 1 (^{a^b/c}) 3 =</div>	1 _r 2
$\sqrt{\frac{64}{225}}$ =	<div>2ndF √ 64 (^{a^b/c}) 225 =</div>	8 _r 15
$\frac{2^3}{3^4}$ =	<div>(2 (^{y^x}) 3) (^{a^b/c}) (3 (^{y^x}) 4) -</div>	8 _r 81
$\frac{1.2}{2.3}$ =	<div>1.2 (^{a^b/c}) 2.3 =</div>	12 _r 23
$\frac{1^2 \cdot 2^3}{2}$ =	<div>1 (^{D^{MS}}) 2 (^{D^{MS}}) 3 (^{a^b/c}) 2 =</div>	0'31'1.5"
$\frac{1 \times 10^3}{2 \times 10^2}$ =	<div>1 Exp 3 (^{a^b/c}) 2 Exp 3 =</div>	1 _r 2
A = 7	<div>ON/C 7 STO A</div>	7.
$\frac{4}{A}$ =	<div>4 (^{a^b/c}) ALPHA A =</div>	4 _r 7
$1.25 + \frac{2}{5} = [a\frac{b}{c}]$	<div>1.25 + 2 (^{a^b/c}) 5 =</div>	1.65
→[a $\frac{b}{c}$]	<div>a^b/c</div>	1 _r 13 _r 20
* 4 _r 5 _r 6 _r = 4 $\frac{5}{6}$		

[11] ◀BIN ▶PEN ◀OCT ▶HEX ▶DEC NEG NOT AND OR XOR XNOR		
DEC(25)→BIN	<div>ON/C 2ndF ▶DEC 25 2ndF ▶BIN</div>	11001 ^b
HEX(1AC)	<div>2ndF ▶HEX 1AC</div>	
→BIN	<div>2ndF ▶BIN</div>	110101100 ^b
→PEN	<div>2ndF ▶PEN</div>	3203 ^b
→OCT	<div>2ndF ▶OCT</div>	654 ^b
→DEC	<div>2ndF ▶DEC</div>	428.
BIN(1010-100)	<div>2ndF ▶BIN (1 1010 - 100)</div>	
×11 =	<div>× 11 =</div>	10010 ^b
BIN(111)→NEG	<div>NEG 111 =</div>	1111111001 ^b
HEX(1FF)+	<div>2ndF ▶HEX 1FF 2ndF ▶OCT +</div>	
OCT(512)=	<div>512 =</div>	1511 ^b
HEX(?)	<div>2ndF ▶HEX</div>	349 ^h

2FEC-	<div>ON/C STO M 2ndF ▶HEX 2FEC -</div>	
2C9E=(A)	<div>2C9E M+</div>	34E ^h
+2000-	<div>2000 -</div>	
1901=(B)	<div>1901 M+</div>	6FF ^h
(C)	<div>RCL M</div>	A4d ^h
1011 AND	<div>ON/C 2ndF ▶BIN 1011 AND</div>	
101 = (BIN)	<div>101 =</div>	1 ^b
5A OR C3 = (HEX)	<div>2ndF ▶HEX 5A OR C3 =</div>	db ^h
NOT 10110 = (BIN)	<div>2ndF ▶BIN NOT 10110 =</div>	1111101001 ^b
24 XOR 4 = (OCT)	<div>2ndF ▶OCT 24 XOR 4 =</div>	20 ^o
B3 XNOR	<div>2ndF ▶HEX B3 XNOR</div>	
2D = (HEX)	<div>2D =</div>	FFFFFFF61 ^h
→DEC	<div>2ndF ▶DEC</div>	-159.

[12] D^{MS} ↔DEG MATH (→sec, →min)		
12°39'18.05"	<div>ON/C 12 (^{D^{MS}}) 39 (^{D^{MS}}) 18.05</div>	
→[10]	<div>2ndF ↔DEG</div>	12.65501389
123.678→[60]	<div>123.678 2ndF ↔DEG</div>	123°40'40.8"
3h30m45s + 6h45m36s = [60]	<div>3 (^{D^{MS}}) 30 (^{D^{MS}}) 45 + 6 (^{D^{MS}}) 45 (^{D^{MS}}) 36 =</div>	10°16'21."
1234°56'12" + 0°0'34.567" = [60]	<div>1234 (^{D^{MS}}) 56 (^{D^{MS}}) 12 + 0 (^{D^{MS}}) 34.567 =</div>	1234°56'47."
3h45m - 1.69h = [60]	<div>3 (^{D^{MS}}) 45 - 1.69 =</div>	2°3'36."
sin62°12'24" = [10]	<div>(sin) 62 (^{D^{MS}}) 12 (^{D^{MS}}) 24(=</div>	0.884635235
24°→[°]	<div>24 (^{D^{MS}}) MATH 2 =</div>	86°400.
1500"→[°]	<div>0 (^{D^{MS}}) 0 (^{D^{MS}}) 1500 MATH (3 =</div>	25.

[13] →Fθ ↔xy → ↔→→		
$\begin{cases} x = 6 \\ y = 4 \end{cases} \rightarrow \begin{cases} r = \\ \theta = [^\circ] \end{cases}$	<div>ON/C 6 2ndF → 4 2ndF →r [r] 2ndF ↔→→ [θ] 2ndF ↔→→ [r]</div>	7.211102551 33.69006753 7.211102551
	<div>14 2ndF → 36 2ndF ↔xy [x] 2ndF ↔→→ [y] 2ndF ↔→→ [x]</div>	11.32623792 8.228993532 11.32623792

[14] CNST		
V ₀ = 15.3m/s	<div>ON/C 15.3 × 10 + 2 2ndF X⁻¹ ×</div>	
t = 10s	<div>2ndF CNST 03 × 10 X² =</div>	643.3325
V ₀ t+ $\frac{1}{2}$ gt ² = ?m		

[15] CONV		
125yd = ?m	<div>ON/C 125 2ndF CONV 5 =</div>	114.3

[16] MATH (k, M, G, T, m, μ, n, p, f)		
100m×10k=	<div>100 MATH (1 4) × 10 MATH (1 0 0) =</div>	1'000.

[17] MDF SETUP		
5÷9=ANS	<div>ON/C SETUP 1 0 SETUP 2 1</div>	
ANS×9=	<div>5 ÷ 9 =</div>	0.6
[FIX,TAB=1]	<div>× 9 = *1</div>	5.0
	<div>5 ÷ 9 (=) = *2 2ndF MDF × 9 (=) *2</div>	0.6
	<div>SETUP 1 3</div>	5.4

*1 5.5555555555555×10⁻³

*2 0.6×9

[18] MATH (SOLV)		
sin x-0.5	<div>ON/C sin (ALPHA) X - 0.5</div>	
Start=0	<div>MATH 0 0 ENT ENT</div>	30.
Start= 180	<div>ENT 180 ENT ENT</div>	150.

[19] ALGB		
	<div>MODE 0 (ALPHA) X (^{y^x}) 3 - 3 (ALPHA) X (^{X²}) + 2 2ndF ALGB</div>	
f(x) = x ³ -3x ² +2	<div>1 +/- (ENT) 2ndF ALGB 0.5 +/- ENT √A²:B² (2ndF) √ (ALPHA) A (^{X²}) + (ALPHA) B (^{X²}) (2ndF) ALGB</div>	
x = -1	<div>2 ENT 3 ENT</div>	3.605551275
x = -0.5	<div>2ndF ALGB ENT 5 ENT</div>	5.385164807


$(A+B_i) \times (C+D_i)$	$(AC - BD) < 10^{100}$ $(AD + BC) < 10^{100}$
$(A+B_i) \div (C+D_i)$	$\frac{AC + BD}{C^2 + D^2} < 10^{100}$ $\frac{BC - AD}{C^2 + D^2} < 10^{100}$ $C^2 + D^2 \neq 0$
→DEC →BIN →PEN →OCT →HEX AND OR XOR XNOR	DEC : $ x \leq 9999999999$ BIN : $1000000000 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN : $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222222$ OCT : $4000000000 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX : $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FF$
NOT	BIN : $1000000000 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN : $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222221$ OCT : $4000000000 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX : $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FE$
NEG	BIN : $1000000001 \leq x \leq 1111111111$ $0 \leq x \leq 1111111111$ PEN : $2222222223 \leq x \leq 4444444444$ $0 \leq x \leq 2222222222$ OCT : $4000000001 \leq x \leq 7777777777$ $0 \leq x \leq 3777777777$ HEX : $FDABF41C01 \leq x \leq FFFFFFFF$ $0 \leq x \leq 2540BE3FF$

* n, m, i, r; integer

Physical constants and metric conversions are shown in the tables:

PHYSICAL CONSTANTS			(2ndF) (CNST) 01 — 52
No. SYMBOL	UNIT	No. SYMBOL	UNIT
01 - c , c_0	m s ⁻¹	19 - μ_B	J T ⁻¹
02 - G	m ³ kg ⁻¹ s ⁻²	20 - μ_e	J T ⁻¹
03 - g_n	m s ⁻²	21 - μ_N	J T ⁻¹
04 - m_e	kg	22 - μ_p	J T ⁻¹
05 - m_p	kg	23 - μ_n	J T ⁻¹
06 - m_n	kg	24 - μ_H	J T ⁻¹
07 - m_H	kg	25 - λ_c	m
08 - I_H	kg	26 - $\lambda_{c,p}$	m
09 - e	C	27 - σ	W m ⁻² K ⁻⁴
10 - h	J s	28 - N_A, L	mol ⁻¹
11 - k	J K ⁻¹	29 - V_m	m ³ mol ⁻¹
12 - μ_0	N A ⁻²	30 - R	J mol ⁻¹ K ⁻¹
13 - ϵ_0	F m ⁻¹	31 - F	C mol ⁻¹
14 - r_e	m	32 - R_K	Ohm
15 - α		33 - $-e/m_e$	C kg ⁻¹
16 - a_0	m	34 - $h/2m_e$	m ² s ⁻¹
17 - R_∞	m ⁻¹	35 - γ_p	s ⁻¹ T ⁻¹
18 - Φ_0	Wb	36 - K_J	Hz V ⁻¹

METRIC CONVERSIONS			x (2ndF) (CONV) 1 — 44
No.	UNIT	No.	UNIT
1	in→cm	16	kg→lb
2	cm→in	17	°F→°C
3	ft→m	18	°C→°F
4	m→ft	19	gal (US)→ℓ
5	yd→m	20	ℓ→gal (US)
6	m→yd	21	gal (UK)→ℓ
7	mile→km	22	ℓ→gal (UK)
8	km→mile	23	fl oz (US)→mℓ
9	n mile→m	24	mℓ→fl oz (US)
10	m→n mile	25	fl oz (UK)→mℓ
11	acre→m ²	26	mℓ→fl oz (UK)
12	m ² →acre	27	J→cal
13	oz→g	28	cal→J
14	g→oz	29	J→cal ₁₅
15	lb→kg	30	cal ₁₅ →J
		31	J→cal _{IT}
		32	cal _{IT} →J
		33	hp→W
		34	W→hp
		35	ps→W
		36	W→ps
		37	kgf/cm ² →Pa
		38	Pa→kgf/cm ²
		39	atm→Pa
		40	Pa→atm
		41	mmHg→Pa
		42	Pa→mmHg
		43	kgf·m→J
		44	J→kgf·m



ENGLISH

Information on the Disposal of this Equipment and its Batteries

1. In the European Union

Attention: If you want to dispose of this equipment, please do not use the ordinary dust bin!

Used electrical and electronic equipment must be treated separately and in accordance with legislation that requires proper treatment, recovery and recycling of used electrical and electronic equipment. Following the implementation by member states, private households within the EU states may return their used electrical and electronic equipment to designated collection facilities free of charge*. In some countries* your local retailer may also take back your old product free of charge if you purchase a similar new one.

*) Please contact your local authority for further details.

If your used electrical or electronic equipment has batteries or accumulators, please dispose of these separately beforehand according to local requirements.

By disposing of this product correctly you will help ensure that the waste undergoes the necessary treatment, recovery and recycling and thus prevent potential negative effects on the environment and human health which could otherwise arise due to inappropriate waste handling.

2. In other Countries outside the EU

If you wish to discard this product, please contact your local authorities and ask for the correct method of disposal.

Attention:

Your product is marked with this symbol. It means that used electrical and electronic products should not be mixed with general household waste. There is a separate collection system for these products.

Manufactured by:

SHARP CORPORATION

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

For EU only:

Imported into Europe by:

MORAVIA Consulting spol. s r.o.

Olomoucká 83, 627 00 Brno, Czech Republic

For UK only:

Imported into UK by:

MORAVIA Europe Ltd.

Belmont House, Station Way, Crawley, West Sussex RH10 1JA, Great Britain